


NCJRS

This microfiche was produced from documents received for inclusion in the NCJRS data base. Since NCJRS cannot exercise control over the physical condition of the documents submitted, the individual frame quality will vary. The resolution chart on this frame may be used to evaluate the document quality.

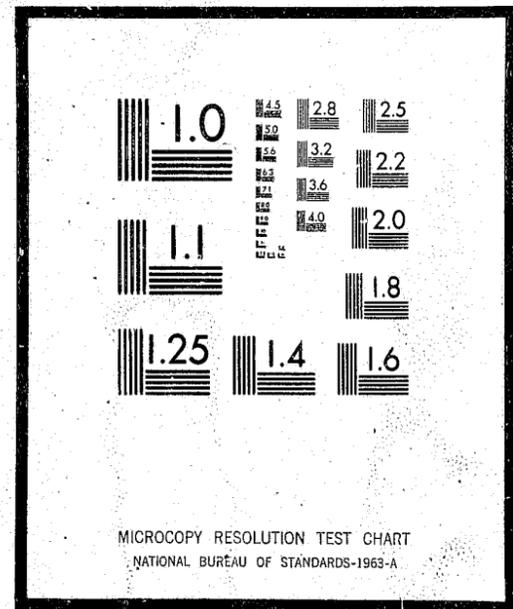

Microfilming procedures used to create this fiche comply with the standards set forth in 41CFR 101-11.504

Points of view or opinions stated in this document are those of the author(s) and do not represent the official position or policies of the U.S. Department of Justice.

U.S. DEPARTMENT OF JUSTICE
LAW ENFORCEMENT ASSISTANCE ADMINISTRATION
NATIONAL CRIMINAL JUSTICE REFERENCE SERVICE
WASHINGTON, D.C. 20531

6/4/76

Date filmed

LAW ENFORCEMENT STANDARDS PROGRAM

NILECJ STANDARD FOR PERSONAL/PORTABLE FM RECEIVERS

A Voluntary National Standard Promulgated by the
National Institute of Law Enforcement and Criminal Justice.

OCTOBER 1975

U.S. DEPARTMENT OF JUSTICE
Law Enforcement Assistance Administration
National Institute of Law Enforcement and Criminal Justice

**NATIONAL INSTITUTE OF LAW ENFORCEMENT
AND CRIMINAL JUSTICE**

Gerald M. Caplan, *Director*

**LAW ENFORCEMENT ASSISTANCE
ADMINISTRATION**

Richard W. Velde, *Administrator*

ACKNOWLEDGMENTS

This standard was formulated by the Law Enforcement Standards Laboratory of the National Bureau of Standards under the direction of Marshall J. Treado, Program Manager for Communications Systems, and Jacob J. Diamond, Chief of LESL. NBS Electromagnetics Division staff members responsible for the preparation of the standard were Harold E. Taggart, project manager, M. Gerald Arthur, Leon F. Saulsbery, Winston W. Scott, Jr., and John F. Shafer. Acknowledgment is given to previous work in this field by the Associated Public-Safety Communications Officers, Inc.; the Institute of Electrical and Electronics Engineers, Inc.; the Electronic Industries Association; the American National Standards Institute; and the International Electrotechnical Commission.

For sale by the Superintendent of Documents, U.S. Government Printing Office
Washington, D.C. 20402 - Price 45 cents
Stock Number O27-000-00366-4

There is a minimum charge of \$1.00 for each mail order

**NILECJ STANDARD
FOR
PERSONAL/PORTABLE FM RECEIVERS**

CONTENTS

	Page
Foreword	v
1. Purpose and Scope	1
2. Classification	1
3. Definitions	1
4. Requirements	3
4.1 Minimum Performance	3
4.2 User Information	3
4.3 Test Sequence	3
4.4 Environmental Characteristics	3
4.5 SINAD Sensitivity	5
4.6 Selectivity Characteristics	5
4.7 Squelch Characteristics	6
4.8 Audiofrequency Characteristics	6
5. Test Methods	6
5.1 Standard Test Conditions	6
5.2 Test Equipment	7
5.3 Environmental Tests	8
5.4 SINAD Sensitivity Test	8
5.5 Selectivity Tests	9
5.6 Squelch Tests	10
5.7 Audiofrequency Tests	12
Appendix A—Bibliography	13

FOREWORD

Following a Congressional mandate¹ to develop new and improved techniques, systems, and equipment to strengthen law enforcement and criminal justice, the National Institute of Law Enforcement and Criminal Justice (NILECJ) has established the Law Enforcement Standards Laboratory (LESL) at the National Bureau of Standards. LESL's function is to conduct research that will assist law enforcement and criminal justice agencies in the selection and procurement of quality equipment.

In response to priorities established by NILECJ, LESL is (1) subjecting existing equipment to laboratory testing and evaluation and (2) conducting research leading to the development of several series of documents, including national voluntary equipment standards, user guidelines, state-of-the-art surveys and other reports.

This document, NILECJ-STD-0208.00, Personal/Portable FM Receivers, is a law enforcement equipment standard developed by LESL and approved and issued by NILECJ. Additional standards as well as other documents are being issued under the LESL program in the areas of protective equipment, communications equipment, security systems, weapons, emergency equipment, investigative aids, vehicles and clothing.

This equipment standard is a technical document consisting of performance and other requirements together with a description of test methods. Equipment which can meet these requirements is of superior quality and is suited to the needs of law enforcement agencies. Purchasing agents can use the test methods described in this standard to determine firsthand whether a particular equipment item meets the requirements of the standard, or they may have the tests conducted on their behalf by a qualified testing laboratory. Law enforcement personnel may also reference this standard in purchase documents and require that any equipment offered for purchase meet its requirements and that this compliance be either guaranteed by the vendor or attested to by an independent testing laboratory.

The necessarily technical nature of this NILECJ standard, and its special focus as a procurement aid, make it of limited use to those who seek general guidance concerning personal/portable FM receivers. The NILECJ Guideline Series is designed to fill that need. We plan to issue guidelines to this as well as other law enforcement equipment as soon as possible, within the constraints of available funding and the overall NILECJ program.

The guideline documents being issued are highly readable and tutorial in nature in contrast to the standards, which are highly technical and intended for laboratory use by technical personnel. The guidelines will provide, in non-technical language, information for purchasing agents and other interested persons concerning the capabilities of equipment currently available. They may then select equipment appropriate to the performance required by their agency. Recommendations for the development of particular guidelines should be sent to us.

NILECJ standards are subjected to continuing review. Technical comments and recommended revisions are invited from all interested parties. Suggestions should be addressed to the Program Manager for Standards, National Institute of Law Enforcement and Criminal Justice, Law Enforcement Assistance Administration, U.S. Department of Justice, Washington, D.C. 20531.

LESTER D. SHUBIN
*Program Manager for Standards
National Institute of Law
Enforcement and Criminal Justice*

¹ Section 402(b) of the Omnibus Crime Control and Safe Streets Act of 1968, as amended.

NILECJ STANDARD FOR PERSONAL/PORTABLE FM RECEIVERS

1. PURPOSE AND SCOPE

The purpose of this document is to establish performance requirements and methods of test for frequency modulated personal/portable receivers used by law enforcement agencies. This standard applies to voice-modulated, non-multiplex receivers which either do not have special subsystems such as selective signaling or voice privacy, or in which such subsystems are disabled or by-passed during testing for compliance with this standard.

2. CLASSIFICATION

For the purposes of this standard, personal/portable FM receivers are classified by their operating frequencies and their channel spacing.

2.1 Type I

Receivers that operate in the 400–512 MHz band with a channel spacing of 25 kHz.

2.2 Type II

Receivers that operate in the 150–174 MHz band with a channel spacing of 30 kHz.

2.3 Type III

Receivers that operate in the 25–50 MHz band with a channel spacing of 20 kHz.

3. DEFINITIONS

The principal terms used in this document are defined in this section. Additional definitions relating to law enforcement communications are given in LESP–RPT–0203.00, "Technical Terms and Definitions Used With Law Enforcement Communications Equipment (Radio Antennas, Transmitters and Receivers)."

3.1 Adjacent-Channel Selectivity and Desensitization

The ability of a receiver to discriminate between a desired signal and an undesired signal at the frequency of an adjacent channel.

3.2 Audio Hum and Noise Power

The average audiofrequency power dissipated in a load across the output terminals of a receiver having an unmodulated radio-frequency signal input.

3.3 Audio Noise Output Power

The average audiofrequency power dissipated in a load across the output terminals of an unmodulated receiver having no radio-frequency signal input.

3.4 Audio Output Power

The audiofrequency power dissipated in a load across the output terminals of an unmodulated receiver having a modulated radio-frequency signal input.

3.5 Audiofrequency Harmonic Distortion

The generation, in a system, or integral multiples of a single audiofrequency input signal.

3.6 Audiofrequency Response

The variation in the output of the receiver as a function of frequency within a specified bandwidth.

3.7 Intermodulation Attenuation

The ratio, expressed in decibels, of (1) selected rf signal levels that produce an intermodulation response to (2) the receiver's SINAD sensitivity.

3.8 Intermodulation Response

The response resulting from the mixing of two or more frequencies, in the nonlinear elements of a receiver, in which a resultant frequency is generated that falls within the range of frequencies passed by the receiver.

3.9 Modulation Acceptance Bandwidth

The maximum frequency deviation of an input signal which has twice the amplitude of the 12 dB sensitivity voltage and which produces a 12 dB SINAD ratio.

3.10 Noise Quieting

The reduction of audio noise output power caused by an RF signal.

3.11 Rated System Deviation

The maximum carrier frequency deviation permitted by the FCC; for law enforcement communications systems, it is ± 5 kHz.

3.12 Receive Mode

The condition of a receiver when unsequelched and receiving information.

3.13 Selectivity

The extent to which a receiver is capable of differentiating between the desired signal and disturbances at other frequencies.

3.14 SINAD Ratio

A measure of the audio output of a receiver, expressed in decibels, equal to (1) signal plus noise plus distortion to (2) noise plus distortion; from *Signal Noise And Distortion Ratio*.

3.15 SINAD Sensitivity

The minimum modulated RF signal input level required to produce a specified SINAD ratio at a designated audio output power level.

3.16 Spurious Response

The output of a receiver caused by a signal at a frequency other than that to which the receiver is tuned.

3.17 Squelch Attack Time

The time required to produce a designated audio output power level upon application of an rf input signal.

3.18 Squelch Block

A squelched condition resulting from excessive frequency deviation.

3.19 Squelch

A circuit function for preventing a radio receiver from producing audio output power in the absence of rf signals.

3.20 Squelch Release Time

The time required to reduce audio noise output power to a designated level upon removal of the rf input signal.

3.21 Standby Mode

The condition in a transmitting and receiving system when the system is energized but not receiving or transmitting.

3.22 Threshold Squelch Sensitivity

The minimum rf signal input level with standard modulation required to unsequelch the receiver when the squelch control is in the threshold squelched position.

3.23 Threshold Squelched Position

The adjustment of the squelch control, starting from the maximum unsequelched position, that first reduces the audio noise output power by a specified amount.

3.24 Tight-Squelch Sensitivity

The minimum standard modulated rf signal input level required to unsequelch the receiver when the squelch control is in the maximum squelched position.

4. REQUIREMENTS

4.1 Minimum Performance

The requirement for each receiver characteristic shall be the value listed in table 1. These performance requirements are compatible with those for transmitters which are licensed according to the Rules and Regulations published by the Federal Communications Commission. In addition to the requirements listed, all of the licensing and operating requirements of the FCC Rules and Regulations shall apply.

4.2 User Information

The receiver operating frequencies and nominal values for the receiver audio output impedance, the power supply voltage and each receiver characteristic listed in table 1 shall be included in the information supplied to the user by the manufacturer or distributor. In addition, the receiver being tested shall contain provisions for disconnecting the integral antenna and for connecting a signal generator to the rf input circuit.

4.3 Test Sequence

Each receiver shall be subjected to the environmental tests before being tested for conformance with paragraphs 4.5 through 4.8.

4.4 Environmental Characteristics

The ability of the receiver to operate in environmental extremes shall be determined using the test methods described in paragraph 5.3. The receiver shall meet the minimum performance requirements (items A through T) after completing all environmental tests.

4.4.1 Temperature Stability

When the receiver is operated at temperatures of -30°C (-22°F) and 60°C (140°F), its performance shall not vary, with respect to the appropriate value in table 1 (item A through T), more than item U through AA, for the characteristics listed. In addition, the audio distortion at an output power of (item M) shall be less than (item AB) for an rf signal with standard modulation.

4.4.2 Humidity Stability

After the receiver has been maintained at 50°C (122°F) and 90 percent relative humidity or greater for at least 8 hours, its performance shall not vary with respect to the appropriate value

TABLE 1.—Minimum Performance Requirements for Personal/Portable FM Receivers.

Receiver Characteristic	Minimum Requirement Frequency Band (MHz)		
	25-50	150-174	400-512
<i>Sensitivity Characteristics</i>			
A. SINAD Sensitivity	0.5 μ V	0.5 μ V	0.5 μ V
B. SINAD Sensitivity Variance (Supply Voltage Varied +10% and -20%)	0.7 μ V	0.7 μ V	0.7 μ V
<i>Selectivity Characteristics</i>			
C. Modulation Acceptance Bandwidth	± 5 kHz	± 5 kHz	± 5 kHz
D. Adjacent Channel Selectivity and Desensitization	60 dB	70 dB	60 dB
E. Spurious Response Attenuation	70 dB	60 dB	60 dB
F. Intermodulation Attenuation	70 dB	60 dB	60 dB
<i>Squelch Characteristics</i>			
G. Threshold Squelch Sensitivity	0.3 μ V	0.4 μ V	0.4 μ V
H. Tight Squelch Sensitivity	3.0 μ V	4.0 μ V	4.0 μ V
I. Threshold Squelch Sensitivity Variance (Supply Voltage Varied +10% and -20%)	0.6 μ V	0.8 μ V	0.8 μ V
J. Squelch Block	± 5 kHz	± 5 kHz	± 5 kHz
K. Squelch Attack Time	150 ms	150 ms	150 ms
L. Squelch Release Time	250 ms	250 ms	250 ms
<i>Audiofrequency Characteristics</i>			
M. Audio Output Power (Loudspeaker)	500 mW	500 mW	500 mW
N. Audio Output Power (Earphones)	3 mW	3 mW	3 mW
O. Audio Output Power Variance (Supply Voltage Varied +10% and -20%)	3 dB	3 dB	3 dB
P. Audio Distortion	10%	10%	10%
Q. Audiofrequency Response (Loudspeaker)	-10, +2 dB	-10, +2 dB	-10, +2 dB
R. Audiofrequency Response (Earphones)	-10, +2 dB	-10, +2 dB	-10, +2 dB
S. Audio Hum and Noise (Unsquelled)	40 dB	40 dB	40 dB
T. Audio Hum and Noise (Squelled)	50 dB	50 dB	50 dB
<i>Temperature Stability</i>			
U. SINAD Sensitivity	6 dB	6 dB	6 dB
V. Modulation Acceptance Bandwidth	20%	20%	20%
W. Adjacent Channel Selectivity and Desensitization	12 dB	12 dB	12 dB
X. Tight Squelch Sensitivity	6 dB	6 dB	6 dB
Y. Threshold Squelch Sensitivity	6 dB	6 dB	6 dB
Z. Audio Output Power	6 dB	6 dB	6 dB
AA. Audio Hum and Noise	10 dB	10 dB	10 dB
AB. Audio Distortion	18%	18%	18%
<i>Humidity Stability</i>			
AC. SINAD Sensitivity	10 dB	10 dB	10 dB
AD. Modulation Acceptance Bandwidth	20%	20%	20%
AE. Adjacent Channel Selectivity and Desensitization	12 dB	12 dB	12 dB

TABLE 1.—Minimum Performance Requirements for Personal/Portable FM Receivers—Continued

Receiver Characteristic	Minimum Requirement Frequency Band (MHz)		
	25-50	150-174	400-512
AF. Tight Squelch Sensitivity	10 dB	10 dB	10 dB
AG. Threshold Squelch Sensitivity	10 dB	10 dB	10 dB
AH. Audio Output Power	3 dB	3 dB	3 dB
AI. Audio Hum and Noise	10 dB	10 dB	10 dB
AJ. Audio Distortion	18%	18%	18%

in table 1 (item A through T), more than item AC through AI, for the characteristics listed. In addition, the audio distortion at an output power of (item M) shall be less than (item AJ) for an rf signal with standard modulation.

4.4.3 Vibration Stability

No fixed part of the receiver shall come loose, nor movable part be shifted in position or adjustment, as a result of this test.

4.4.4 Shock Stability

No fixed part of the receiver shall come loose, nor movable part be shifted in position or adjustment, as a result of this test.

4.5 SINAD Sensitivity

When measured in accordance with paragraph 5.4, the SINAD sensitivity of the receiver shall be (item A) or less at a SINAD ratio of 12 dB and at least 50 percent of the value of audio output power (item M). When the standard power supply voltage is varied +10 percent and -20 percent, the SINAD sensitivity shall be (item B) or less.

4.6 Selectivity Characteristics

The selectivity characteristics of modulation acceptance bandwidth, adjacent channel selectivity and desensitization, spurious response attenuation, and intermodulation attenuation shall be measured in accordance with paragraph 5.5.

4.6.1 Modulation Acceptance Bandwidth

The modulation acceptance bandwidth of the receiver shall be (item C) or more for an applied rf signal 6 dB above the measured 12 dB SINAD sensitivity value.

4.6.2 Adjacent Channel Selectivity and Desensitization

The adjacent channel selectivity and desensitization of the receiver shall be (item D) or more for a degradation of an on-channel signal from 12 dB SINAD ratio to 6 dB SINAD ratio caused by an adjacent channel signal.

4.6.3 Spurious Response Attenuation

The spurious response attenuation of the receiver shall be (item E) or more as compared to the on-channel 20 dB noise quieting signal voltage for responses of the receiver between the lowest intermediate frequency of the receiver and 1000 MHz.

4.6.4 Intermodulation Attenuation

The intermodulation attenuation of the receiver shall be (item F) or more for a degradation of an on-channel signal from 12 dB SINAD ratio to 6 dB SINAD ratio by two relatively strong signals located at one- and two-channel spacings, respectively, from the receiver frequency, both signals being at frequencies either above or below the on-channel signal.

4.7 Squelch Characteristics

The squelch characteristics of sensitivity, block, attack time and release time shall be measured in accordance with paragraph 5.6.

4.7.1 Squelch Sensitivity

The threshold squelch sensitivity of the receiver shall be (item G) or less. The tight squelch sensitivity shall be (item H) or less. When the standard power supply voltage is varied +10 percent and -20 percent, the threshold squelch sensitivity shall be (item I) or less.

4.7.2 Squelch Block

The receiver shall not squelch for modulation frequencies of 0.3 to 3.0 kHz when the squelch control is adjusted to the maximum squelch position and the frequency deviation of the input signal is (item J) or less.

4.7.3 Squelch Attack Time

The squelch attack time for the receiver to produce 90 percent of the audio output power (item M) shall be (item K) or less.

4.7.4 Squelch Release Time

The squelch release time for the audio output of the receiver to decrease to 10 percent of the audio output power (item M) shall be (item L) or less.

4.8 Audiofrequency Characteristics

The audiofrequency characteristics of output power, distortion, frequency response, and hum and noise shall be measured in accordance with paragraph 5.7.

4.8.1 Audio Output Power

The audio output power of the receiver shall be at least (item M) if a loudspeaker is used at the receiver output and (item N) if earphones are used. When the standard supply voltage is varied +10 percent and -20 percent, the audio output power shall not be reduced more than (item O) below (item M).

4.8.2 Audio Distortion

Audio distortions at audio output powers of (item M and N) shall be less than (item P) for an rf signal with standard modulation.

4.8.3 Audiofrequency Response

The audiofrequency response of the receiver, when used with a loudspeaker, shall be within (item Q) of an ideal 6 dB per octave de-emphasis curve with constant frequency deviation at frequencies between 0.3 and 3.0 kHz. When used with earphones, the audiofrequency response of the receiver shall be within (item R) of the same curve at frequencies between 0.3 and 3.0 kHz.

4.8.4 Audio Hum and Noise

The audio hum and noise output power from the receiver in an unsquelched condition shall be (item S) or more, and in a squelched condition shall be (item T) or more below audio output power (item M).

5. TEST METHODS

5.1 Standard Test Conditions

Allow all measurement equipment to warm up until the system has achieved sufficient stability to perform the measurement. Unless otherwise specified, perform all measurements under standard test conditions. Disable or bypass all special subsystems before testing.

5.1.1 Standard Temperature

Standard ambient temperature shall be between 20°C (68°F) and 30°C (86°F).

5.1.2 Standard Relative Humidity

Standard ambient relative humidity shall be between 10 and 85 percent.

5.1.3 Standard Power Supply Voltage

The standard supply voltage shall be that stated by the manufacturer and shall be applied to the receiver power supply input terminals. It may be supplied by a battery of the same type as that normally used in the equipment or, preferably, by a well-filtered electronic dc supply. In the latter case, it shall be adjusted to within one percent of the voltage required.

5.1.4 Standard Test Frequency

The standard receiver test frequency shall be any one of the operating frequencies as specified in paragraph 4.2.

5.1.5 Standard Test Modulation

Standard test modulation shall be a 1 kHz sinusoidal modulating signal having less than one percent total distortion at the level required to produce a ± 3 kHz frequency deviation.

5.1.6 Standard Squelch Adjustment

The squelch control shall be adjusted to the maximum unsquelched position for all measurements except where otherwise specified.

5.1.7 Standard Duty Cycle

The standard duty cycle shall be 60 seconds in the receive mode followed by 20 seconds in the standby mode.

5.2 Test Equipment

This section is limited to that equipment which is the most critical in making the measurements discussed in this standard. All other test equipment shall be of comparable quality.

5.2.1 FM Signal Generator

The FM signal generator shall have a 50 ohm output impedance, a maximum standing-wave ratio of 1.2, and a calibrated variable output level accurate to ± 2 dB when terminated in a 50 ohm load. The generator should include a digital frequency counter having an uncertainty no greater than one part in 10^6 , and a deviation monitor or calibrated control for determining the peak frequency deviation with an uncertainty of no greater than 5 percent. If an integral frequency counter is not included, a separate frequency counter having the required accuracy shall be provided.

5.2.2 CW Signal Generator

The CW signal generator shall have the same characteristics as described in paragraph 5.2.1 except that the FM capability is not required.

5.2.3 Standard RF Input Load

The standard rf input load shall consist of a shielded 50 ohm resistor whose standing wave ratio is less than 1.05.

5.2.4 Standard Audio Output Load

The standard audio output load shall be a resistor having a resistance equal to the nominal output impedance of the receiver and a power rating equal to or exceeding the nominal audio output power of the receiver. A filter network shall not be used between the audio output terminals and the audio output load. If an external monitor speaker is used, a matching network to maintain the standard output load impedance at the audio output terminals shall be provided.

5.2.5 Audiofrequency Voltmeter

The audiofrequency voltmeter shall measure rms voltage rather than average or peak voltage. Its measurement uncertainty shall be one percent or less.

5.2.6 Signal Combiner

A signal combiner shall be used when two or more signal generators are connected to the receiver under test. Its amplitude imbalance shall be no greater than 0.2 dB, its standing wave ratio shall be no greater than 1.3, and the isolation between input terminals shall be a minimum of 30 dB. A variety of multiport devices may be used as signal combiners, including power dividers, directional couplers, and hybrid junctions.

5.2.7 Environmental Chamber

The environmental chamber shall produce air temperatures from -30 to 60°C (-22 to 140°F) and relative humidities in excess of 90 percent, while shielding the test receiver from heating or cooling air currents blowing directly on it. The temperature of the test receiver shall be measured with a thermometer separate from the sensor used to control the chamber air temperature. Likewise, humidity shall be measured with a hygrometer separate from the sensor used to control humidity.

5.3 Environmental Tests

5.3.1 Temperature Test

Place the receiver, with outer cases installed and with power turned off, in the environmental chamber. Adjust the temperature to $-30 \pm 2^{\circ}\text{C}$ ($-22 \pm 3.6^{\circ}\text{F}$). Allow the receiver to reach temperature equilibrium and maintain it at this temperature for 30 minutes. Turn the receiver power on. Fifteen minutes after turn-on, test the receiver to determine whether it meets the requirements of paragraph 4.4.1. Repeat the above procedure at a temperature of $60 \pm 2^{\circ}\text{C}$ ($140 \pm 3.6^{\circ}\text{F}$).

5.3.2 Humidity Test

Place the receiver, with power turned off, in the environmental chamber. Adjust the relative humidity to a minimum of 90 percent at 50°C (122°F) or more. Maintain the receiver at these conditions for at least 8 hours. With the receiver still in this environment, turn the receiver power on, allow the receiver to stabilize for 15 minutes, and then test it to determine whether it meets the requirements of paragraph 4.4.2.

5.3.3 Vibration Test

Perform a two part test for a total of 30 minutes in each of three directions, namely the directions parallel to both axes of the base and perpendicular to the plane of the base.

First, subject the receiver to three 5-minute cycles of simple harmonic motion having an amplitude of 0.38 mm (0.015 inch) [total excursion of 0.76 mm (0.03 inch)] applied initially at a frequency of 10 Hz and increased at a uniform rate to 30 Hz in $2\frac{1}{2}$ minutes, then decreased at a uniform rate to 10 Hz in $2\frac{1}{2}$ minutes. Repeat for each of the other two directions.

Then subject the receiver to three 5-minute cycles of simple harmonic motion having an amplitude of 0.19 mm (0.0075 inch) [total excursion of 0.38 mm (0.015 inch)] applied initially at a frequency of 30 Hz and increased at a uniform rate to 60 Hz in $2\frac{1}{2}$ minutes, then decreased at a uniform rate to 30 Hz in $2\frac{1}{2}$ minutes. Repeat for each of the other two directions.

5.3.4 Shock Test

Drop the receiver once on each of four or more sides (all sides not having a protrusion or antenna connection), from a height of one meter (3.28 feet) onto a smooth concrete floor. Turn off the receiver power during the test, and use guides to insure contact with the floor by the correct equipment surface.

5.4 SINAD Sensitivity Test

Interconnect the receiver and test equipment as shown in figure 1. Modulate the FM signal generator with standard test modulation and adjust the generator to the standard test frequency. Adjust the generator for 1 millivolt output and the receiver volume control for audio output power (item M). Do not readjust the volume control for the remainder of the measurement. Decrease the output level of the generator until the SINAD ratio of the receiver is 12 dB, as determined with the

distortion analyzer. Measure the audio output power to make certain it is at least 50 percent of item M and record the generator output voltage. Repeat the above using plus 10 percent and minus 20 percent changes in standard power supply voltage.

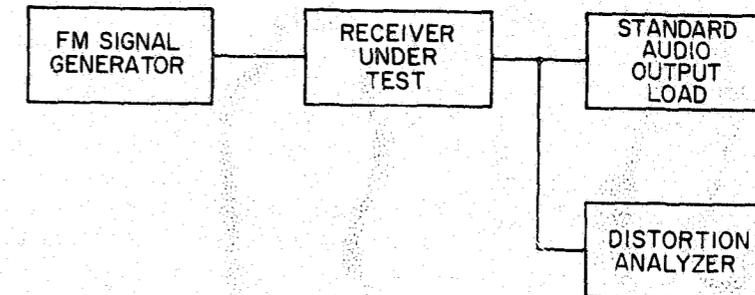


FIGURE 1.—Block diagram for SINAD sensitivity, modulation acceptance bandwidth, squelch sensitivity, squelch block and audio distortion measurements.

5.5 Selectivity Tests

5.5.1 Modulation Acceptance Bandwidth Test

Interconnect the receiver and test equipment as shown in figure 1. Adjust the receiver and FM signal generator in accordance with paragraph 5.4 for the 12 dB SINAD signal sensitivity. Increase the output of the generator by 6 dB, and increase the frequency deviation of the generator until the SINAD ratio is again 12 dB. Record the frequency deviation.

5.5.2 Adjacent Channel Selectivity and Desensitization Test

Interconnect the receiver and test equipment as shown in figure 2. With the output of generator #2 set to zero, adjust the receiver and signal generator #1 in accordance with paragraph 5.4 for the 12 dB SINAD signal sensitivity. Adjust signal generator #2 for 3 kHz frequency deviation at 400 Hz, and set it to a frequency corresponding to the center of the next higher adjacent channel. Then adjust the output of signal generator #2 to produce a 6 dB SINAD ratio with both signals present. The ratio, expressed in decibels, of the output voltage of signal generator #2 to that of signal generator #1 is the adjacent channel selectivity for the upper channel. Repeat the above procedure for the next lower adjacent channel. The smaller of the two ratios is the required measurement.

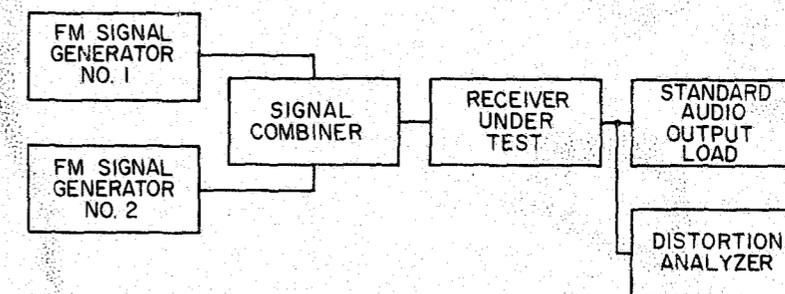


FIGURE 2.—Block diagram for adjacent channel selectivity and desensitization measurement.

5.5.3 Spurious Response Attenuation Test

Interconnect the receiver and test equipment as shown in figure 3. Adjust the unmodulated (CW) signal generator to the standard test frequency. With the generator adjusted for zero output, adjust the receiver volume control to produce 25 percent of item M. This output power is entirely noise power. Do not readjust the volume control for the remainder of the measurement. Increase the output of the generator until the audio noise output power of the receiver is decreased by 20 dB, i.e., 20 dB of noise quieting. Note the generator output in decibels at this frequency. Then increase the output of the generator to approximately 0.1 volt, and slowly vary the generator frequency continuously from just below the lowest intermediate frequency of the receiver to 1000 MHz. Note each frequency that produces a receiver response as indicated by noise quieting in the receiver's audio output. Ignore harmonic frequencies of the generator that fall within the channel to which the receiver is tuned. For each response, adjust the generator output to produce 20 dB of noise quieting. Record the generator output in decibels. The generator output at the spurious response frequency minus the generator output at the standard test frequency is the spurious response attenuation. Repeat for all spurious responses. The smallest attenuation is the value sought.

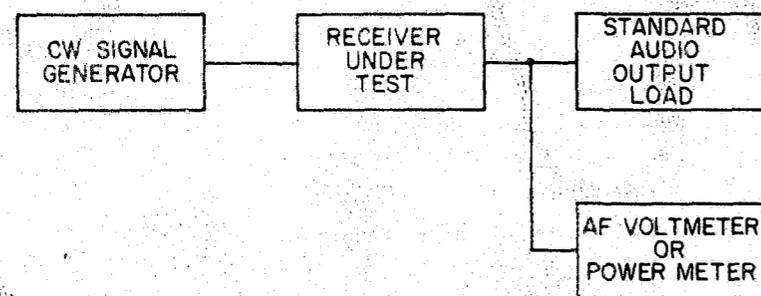


FIGURE 3.—Block diagram for spurious response attenuation measurement.

5.5.4 Intermodulation Attenuation Test

Interconnect the receiver and test equipment as shown in figure 4. With the output levels of signal generators #2 and #3 set to zero, adjust the receiver and FM signal generator #1 in accordance with paragraph 5.4 until a 12 dB SINAD ratio is reached. Adjust the unmodulated generator #2 to the center frequency of the next higher adjacent channel. Adjust generator #3 for 3 kHz frequency deviation at 400 Hz, and set it to the center frequency of the second higher adjacent channel, i.e., two channels above the standard test frequency. Then adjust the output levels of generators #2 and #3 to produce a 6 dB SINAD ratio with all three signals present. Maintain generators #2 and #3 at equal output voltages throughout the measurement. Adjust slightly the frequency of generator #3 to obtain the 6 dB SINAD ratio with the minimum signal levels from generators #2 and #3. The ratio, expressed in decibels, of the output voltage of generator #2 (or #3) to that of generator #1 is the intermodulation attenuation for the upper channels. Repeat the above procedure for the lower two adjacent channels, with generator #3 set to the lowest channel. The smaller of the two ratios is the value sought.

5.6 Squelch Tests

5.6.1 Squelch Sensitivity Tests

Interconnect the receiver and test equipment as shown in figure 1. Adjust the receiver and FM signal generator in accordance with paragraph 5.4 for the 12 dB SINAD signal sensitivity. Set the output level of the generator to zero, and measure the audio noise output power. Slowly adjust the squelch control until the audio noise output power drops abruptly (40 dB or more). Do not adjust the squelch control any further. This is the threshold squelch position. Increase the output level of the signal generator until the measured audio output power is within 10 dB of the audio output

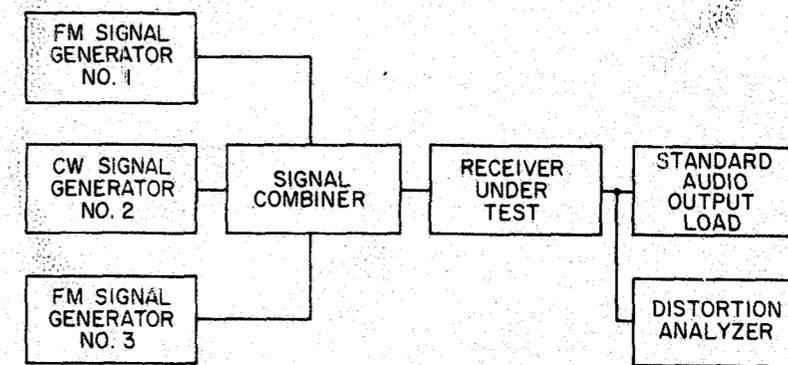


FIGURE 4.—Block diagram for intermodulation attenuation measurement.

power (item M). The signal generator output voltage is the value for threshold squelch sensitivity. Repeat using plus 10 percent and minus 20 percent standard power supply voltage.

Repeat the above procedure with the squelch control in the maximum squelched position. The resultant signal generator output voltage is the value for tight squelch sensitivity.

5.6.2 Squelch Block Test

Interconnect the receiver and test equipment as shown in figure 1. Adjust the receiver and FM signal generator in accordance with Section 5.4 for the 12 dB SINAD signal sensitivity. Set the output level of the signal generator to zero, and measure the audio noise output power. Then set the squelch control to the maximum squelched position. Adjust the output level of the generator to 12 dB above the measured value of the receiver's tight squelch sensitivity voltage. Then increase the frequency deviation of the generator until the audio output power drops abruptly (40 dB or more). Repeat the above procedure with modulation frequencies of 0.3, 0.5, 2.5, and 3.0 kHz. The frequency deviations of the signal generator modulation are the values for squelch block.

5.6.3 Squelch Attack Time Test

Interconnect the receiver and test equipment as shown in figure 5a. With the SPST switch closed, adjust the receiver and FM signal generator in accordance with Section 5.4 for the 12 dB SINAD signal sensitivity. Set the output level of the signal generator to zero, and measure the audio noise output power. Slowly adjust the squelch control until the audio output power drops abruptly (40 dB or more). Do not adjust the squelch control any further. Adjust the generator output level to 12 dB above the measured value of the receiver's threshold squelch sensitivity voltage. Adjust the volume control for audio output power (item M). Adjust the oscilloscope vertical controls for full-scale deflection. Adjust the oscilloscope trigger controls to start the trace upon switch closure. Then close the SPST switch, and adjust the oscilloscope horizontal sweep controls so that the change in audio output level can be easily determined as a function of time. Open and close the SPST switch and photograph the trace. The time between the start of the oscilloscope trace and the time at which the audio level reached 90 percent of audio output power (item M) is the value for squelch attack time.

Note that relay pull-in and drop-out times are usually more than one-tenth the squelch attack and release times. Generally, it will be necessary, therefore, to measure the time differential between the two sets of contacts shown in figure 5a, and to correct the measured squelch attack and release times accordingly. Remove the receiver and FM signal generator and connect the dc power supply as shown in figure 5b. Connect the relay to the vertical input of the oscilloscope and adjust the oscilloscope as in the previous paragraph. Close the SPST switch and photograph the trace. Subtract the relay pull-in time observed in the photograph from the time determined in accordance with the previous paragraph to obtain the squelch attack time.

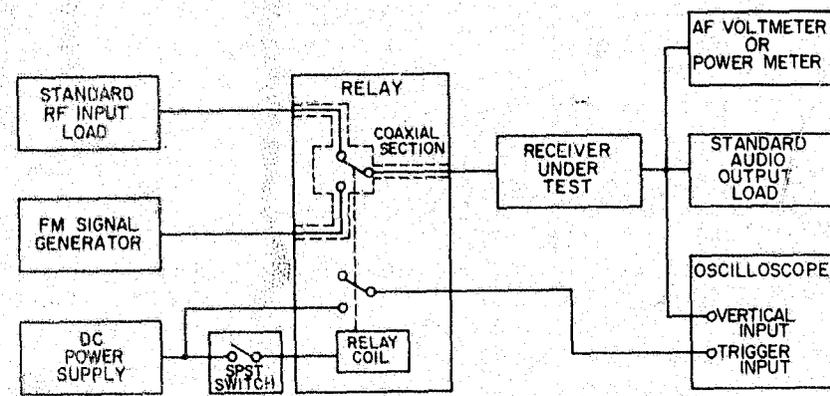


FIGURE 5a.—Block diagram for squelch attack time and squelch release time measurements.

5.6.4 Squelch Release Time Test

Interconnect the receiver and test equipment as shown in figure 5a. Adjust all equipment in accordance with Section 5.6.3. Then adjust the oscilloscope trigger controls to start the trace when the SPST switch is opened. Open the switch and photograph the display. The time between the start of the oscilloscope trace and the time at which the audio level falls to 10 percent of the audio output power (item M) is the value of squelch release time.

Adjust the reading, as in the second paragraph of 5.6.3, by subtracting the relay drop-out time observed in the photograph from the time determined in accordance with the previous paragraph to obtain the squelch release time.

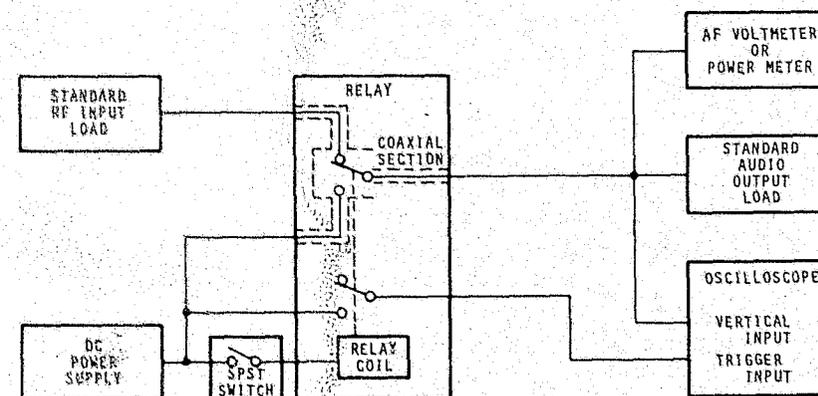


FIGURE 5b.—Block diagram for relay pull-in and drop-out time measurements.

5.7 Audiofrequency Tests

5.7.1 Audio Output Power Test

Interconnect the receiver and test equipment as shown in figure 6. Modulate the FM signal generator with standard test modulation and set it to the standard test frequency. With the signal generator adjusted for 1 millivolt output, set the receiver volume control to the maximum position. Measure and record the audio output power. Repeat using plus 10 percent and minus 20 percent standard power supply voltage.

5.7.2 Audio Distortion Test

Interconnect the receiver and test equipment as shown in figure 1. Modulate the FM signal

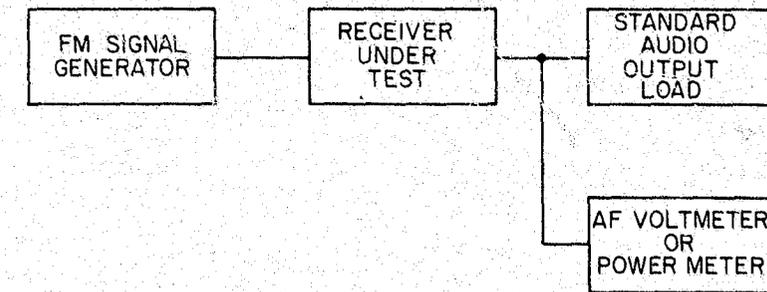


FIGURE 6.—Block diagram for audio output power, audio frequency response and audio hum and noise measurements.

generator with standard test modulation and set the generator to the standard test frequency. With the generator adjusted for 1 millivolt output, adjust the receiver volume control for the audio output power (item M). Measure the audio distortion. Repeat for an audio output power of item N.

5.7.3 Audiofrequency Response Test

Interconnect the receiver and test equipment as shown in figure 6. Modulate the FM signal generator with standard test modulation and set it to the standard test frequency. With the signal generator adjusted for 1 millivolt output, adjust the receiver volume control to 50 percent of the audio output power (item M). Do not readjust the volume control for the remainder of the measurement. Reduce the generator frequency deviation to 1 kHz and measure the audio output power for modulating frequencies of 0.3, 0.5, 2.0, and 3.0 kHz. Compute the ratio, expressed in decibels, of each of these latter power levels to the output power at 1.0 kHz.

5.7.4 Audio Hum and Noise Tests

Interconnect the receiver and test equipment as shown in figure 6. Modulate the FM signal generator with standard test modulation and set it to the standard test frequency. With the signal generator adjusted for 1 millivolt output, adjust the receiver volume control for audio output power (item M). Do not readjust the volume control for the remainder of the measurement. Remove the modulation from the signal generator and measure the audio hum and noise output power. Compute the ratio, expressed in decibels, of the audio output power (item M) to the hum and noise output power. This is the value for audio hum and noise (un-squelched).

Set the squelch control to its maximum squelch position. Set the output level of the generator to zero and measure the audio hum and noise output power. Calculate the ratio in decibels of the audio output power (item M) to the hum and noise output power. This is the value for audio hum and noise (squelched).

APPENDIX A—BIBLIOGRAPHY

1. Buesing, R. T., "Modulation Methods and Channel Separation in the Land Mobile Service," IEEE Trans. on V. T., Vol. VT-19, No. 2, 187-205, (May 1970).
2. Buesing, R. T., and Shepherd, N. H., "System Performance, Compatibility, and Standards," IRE Trans. on V.C., Vol. VC-9, No. 3, 32-43, (December 1960).
3. Chaney, W. G., and Myers, R. T., "Squelch Systems—New Designs for High Performance," IEEE Trans. on V.C., Vol. VC-14, No. 1, 126-133, (March 1965).
4. Farmer, R. A., "SINAD System Design," IRE Trans. on V.C., Vol. VC-10, No. 1, pp. 103-108, (April 1961).
5. Firestone, W. L., "A Review of Communication Interference Problems," IEEE Trans. on V.C., Vol. VC-14, No. 1, 57-66, (March 1965).
6. McCormick, J. A., "15 KC Splits—A Source of Channels in the 150 MC Band," IRE Trans. on V.C., Vol. VC-9, No. 3 94-106, (December 1960).
7. McKee, T. A., "Receiver Intermodulation: Enforcing the Square Law," IEEE Trans. on V.T., Vol. VT-18, No. 3, 141-145, (November 1969).

8. "Minimum Standards for Land Mobile Communications FM or PM Receivers 25-470 MHz," EIA Standard RS-204-A, (July 1972).
9. "Minimum Standards for Portable/Personal Land Mobile Communications FM or PM Equipment 25-470 MC," EIA Standard RS-316, (July 1965).
10. "Minimum Standard for Test Conditions Common to FM or PM Land Mobile Communication Equipment 25-470 MHz," EIA Standard RS-388, (January 1971).
11. "Mobile Stations FM or PM Radiotelephone Transceivers Operating in Certain VHF/UHF Bands in the Frequency Range 27-23 MHz to 470 MHz with RF Power Output Rating Not Exceeding 10 Watts," Canada Dept. of Communications Standard RSS 121, (April 15, 1971).
12. Myers, R. T., "15 KC Split Channels for the 150 MC Land Mobile Services," 1961 IRE Convention Record, Part 8, pp. 228-242.
13. Neubauer, J. R., et al., "IEEE Test Procedure for Frequency-Modulated Mobile Communications Receivers," IEEE Trans. on V.C., Vol. VT-18, No. 2, 84-99, (August 1969). Also appears as IEEE Standard No. 184, (April 1969).
14. Ornstein, W., "Technical Standards for Type Approval of Mobile Communications Equipment in Canada," 1963 IEEE International Convention Record, Part 8, Session 8, 42-48.
15. Runyon, S., "Focus on Signal Generators and Synthesizers," *Electronic Design*, Vol. 21, No. 10, May 10, 1973.

END